

Trail-Lite

*North American's Favorite
Super Lite Weight
Travel Trailers*

Super Lite Weight



Travel Trailers and Fifth Wheels

"Why tow a heavier trailer"



7000 SERIES

SPECIAL FEATURES

SUPER LITE WEIGHT

Safe, Easy, Fuel Efficient Towing

ENCLOSED CHASSIS/UNDERCARRIAGE

Improves Fuel Efficiency Significantly, Improves Appearance, Allows for Much More Interior Storage Space, Better Insulation and Heated Holding Tanks. Corrosion Free Underbelly for Effortless Towing, Low Maintenance

AERODYNAMIC FRONT PROFILE

Less Wind Buffeting, More Stability

LAMINATED ALUMINUM FRAMED CONSTRUCTION

Superior Strength, Light Weight and Exceptional Durability

THICK WALL CONSTRUCTION

50% Thicker Than Other Light Weights, More Insulation, Much Stronger

FIBERGLASS EXTERIOR SKIN

Easy to Maintain, Resistant to Scratches, Dents and Dings

ENCLOSED LP BOTTLE AREA

Protects LP Bottles, Adds to Aerodynamics and Exterior Storage

EXTRA LOW CENTER OF GRAVITY

Stable, Safe Towing with Today's Down Sized Tow Vehicles

WORKS IN THE BASEMENT

Water Tank, Holding Tanks, and Heat Ducts Located Under Floor in the "Basement" Providing for Warm Floors, More Inside Storage Space, Low Center of Gravity

INDEPENDENT TORSION SUSPENSION SYSTEM W/RADIAL TIRES

Unsurpassed Towing Stability

RV 2000 VINYL ROOF

Low Maintenance, "Next Generation" Product, *12 Year Product Warranty

BOX CHANNEL, STEEL CHASSIS

Tougher, Stronger than Punched C-Channel. Powder Coated to Inhibit Corrosion and Improve Appearance.

JALOUSIE WINDOWS


Maximum Ventilation in all Types of Weather

*5 YEAR STRUCTURAL WARRANTY


*LIFETIME CHASSIS WARRANTY (Travel Trailers)

* Refer to specific written warranty statement.


7211

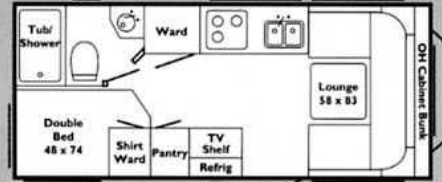


7212

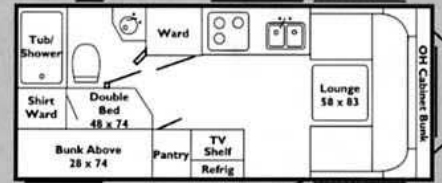

7213

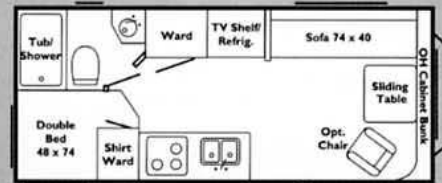

- Welded Aluminum Frame
- 1 1/2" Polystyrene Bl
- Welded Aluminum Fr
- 1 1/2" Polystyrene Bl
- High Impact ABS Fro
- Butyl Tape Sealant on
- RV 2000 Vinyl Roof



Trail-Lite is the only super enclosed chassis is clear of
Airflow is smooth and dra;

Specifications

Total Dry Weight

Load Capacity

Hitch Weight

Length

Exterior Width

Exterior Height

Fresh Water (Gal.)

Grey Water (Gal.)


Black Water (Gal.)

Tire Size


*Weights are approximate and based

7000 SERIES SUPER LITE WEIGHT, 7' WIDE TRAVEL TRAILERS CREATED SPECIFICALLY FOR TODAY'S MINI-VANS AND SPORT UTILITY VEHICLES


7211

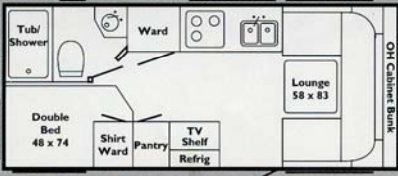


7230

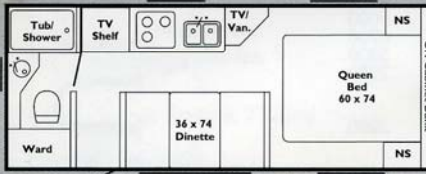


7251

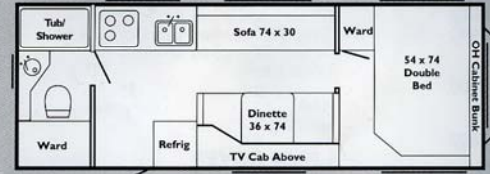


7212

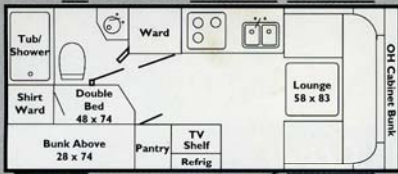


7231

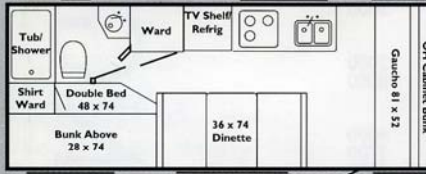


7252

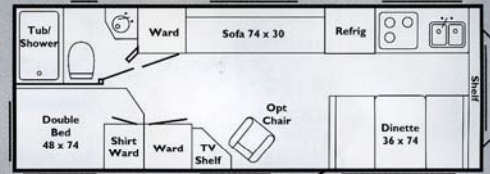


7213

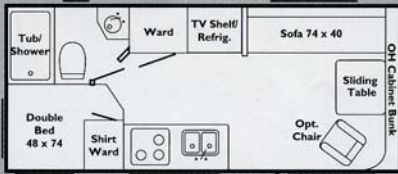

7250

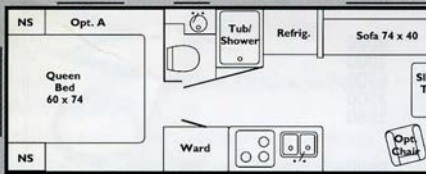


7253

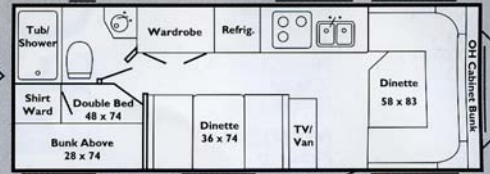

7000/8000 SERIES CONSTRUCTION FEATURES

- Welded Aluminum Framed, Laminated Roof with 1 1/2" Polystyrene Block Foam Insulation (R-7)
- Welded Aluminum Framed, Laminated Floor with 1 1/2" Polystyrene Block Foam Insulation (R-7)
- High Impact ABS Front Cap
- Butyl Tape Sealant on Exterior Seams
- RV 2000 Vinyl Roof
- Welded Aluminum Framed, Laminated Sidewalls with 1 1/2" Polystyrene Block Foam Insulation (R-7)
- Aluminum, Insulated Chassis Enclosure
- Fiberglass Exterior Skin
- Framed, Braced and Wired for A/C
- Under Floor Heat Ducts



Trail-Lite is the only super lightweight RV that uses modern race car technology to bring you towing ease and stability. Trail-Lite's enclosed chassis is clear of the exposed holding tanks, crossmembers and outriggers that create turbulence when the trailer is towed. Airflow is smooth and drag is greatly reduced. Towing a Trail-Lite is a breeze!

Specifications	7211	7212	7213	7230	7231	7250	7251	7252	7253
Total Dry Weight	2745*	2755*	2765*	2895*	2890*	3050*	3075*	3065*	3145*
Load Capacity	1400	1395	1410	1575	1580	1515	1525	1485	1525
Hitch Weight	370*	390*	400*	290*	290*	400*	320*	330*	320*
Length	21'6"	21'6"	21'6"	23'6"	23'6"	25'6"	25'6"	25'6"	25'6"
Exterior Width	7'3"	7'3"	7'3"	7'3"	7'3"	7'3"	7'3"	7'3"	7'3"
Exterior Height	8'3"	8'3"	8'3"	8'3"	8'3"	8'3"	8'3"	8'3"	8'3"
Fresh Water (Gal.)	30	30	30	30	30	30	30	30	30
Grey Water (Gal.)	30	30	30	30	30	30	30	30	30
Black Water (Gal.)	30	30	30	30	30	30	30	30	30
Tire Size	175/80 R13	175/80 R13	175/80 R13	175/80 R13	175/80 R13	175/80 R13	175/80 R13	175/80 R13	175/80 R13


*Weights are approximate and based on standard features; optional equipment not included.

8000 SERIES


SUPER LITE WEIGHT, 8' WIDE TRAVEL TRAILERS
AND 5TH WHEELS CREATED SPECIFICALLY FOR TODAY'S
DOWNSIZED TOW VEHICLES AND SMALLER ENGINES.

EQUINE WHEELS


8240

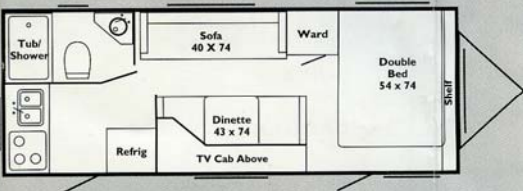


8280

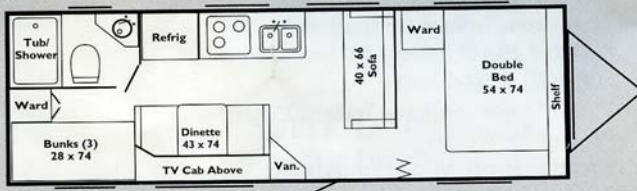


8260

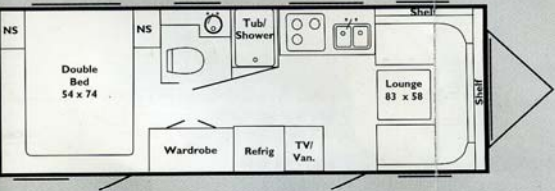


8300

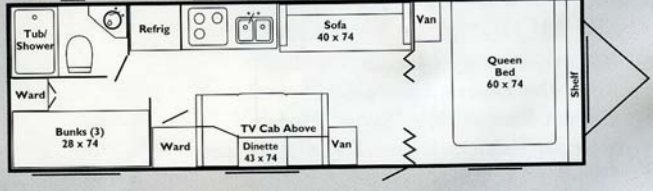


8261

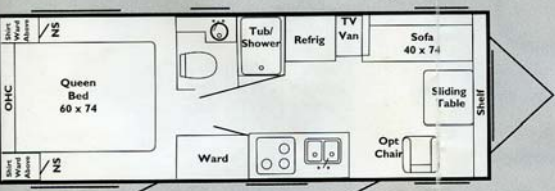


8301

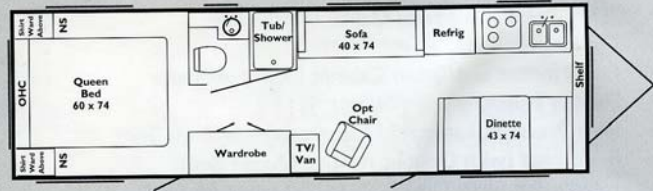


8262

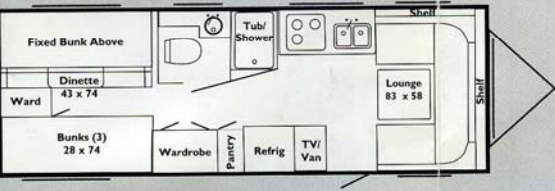


8302

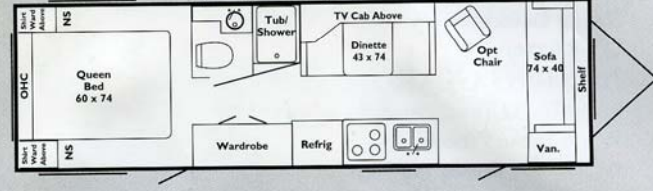


8263-S

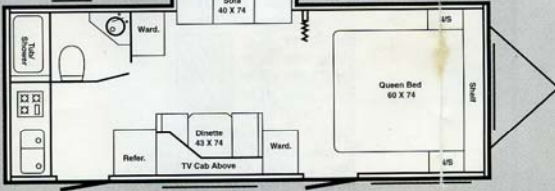

8303-S

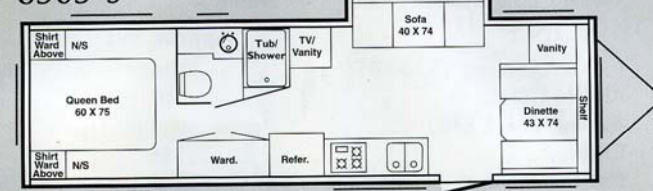


5240




5241-S



5270



5273-S



8240	8260	8261	8262	8263-S	8280	8300	8301	8302	8303-S
3520*	3650*	3615*	3730*	3815*	3830*	4135*	4010*	4040*	4190*
1500*	1500*	1500*	1500*	1500*	1500*	1500*	1500*	1500*	1500*
300*	360*	420*	360*	420*	420*	380*	520*	440*	470*
24'6"	26'6"	26'6"	26'6"	26'6"	28'8"	30'6"	30'6"	30'6"	30'6"
8'	8'	8'	8'	8'	8'	8'	8'	8'	8'
8'3"	8'3"	8'3"	8'3"	8'3"	8'3"	8'3"	8'3"	8'3"	8'3"
30	30	30	30	30	30	30	30	30	30
30	30	30	30	30	30	30	30	30	30
30	30	30	30	30	30	30	30	30	30
205/75	205/75	205/75	205/75	205/75	205/75	205/75	205/75	205/75	205/75
R14	R14	R14	R14	R14	R14	R14	R14	R14	R14


5240	5241-S
4395*	4520*
1600*	1600*
820*	690*
24'6"	24'6"
8'	8'
9'5"	8'3"
30	30
30	30
30	30
205/75	205/75
R14	R14

ES SUPER LITE WEIGHT, 8' WIDE TRAVEL TRAILERS


AND 5TH WHEELS CREATED SPECIFICALLY FOR TODAY'S
DOWNSIZED TOW VEHICLES AND SMALLER ENGINES.

TRAILERS


8280

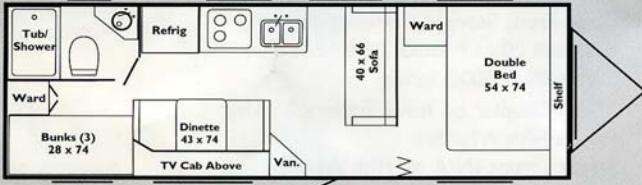


8300

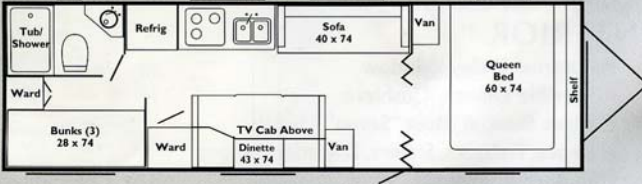


8301

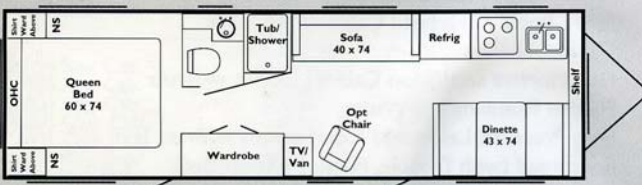


8302

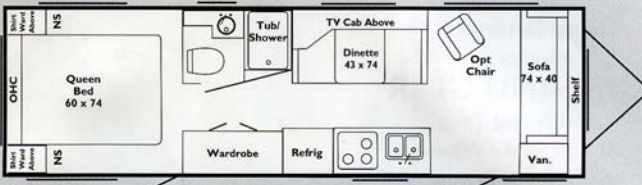


8303-S

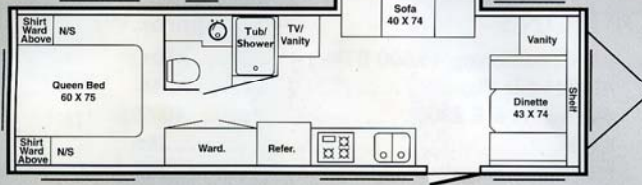


5240

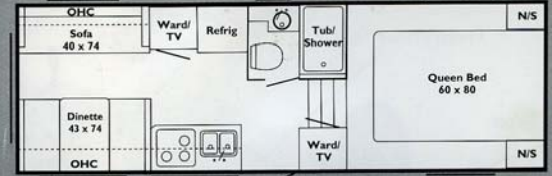


5241-S

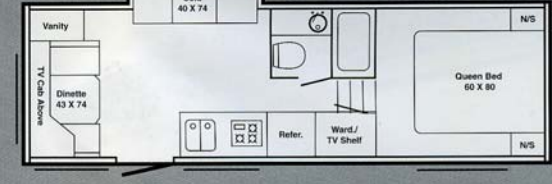

5270

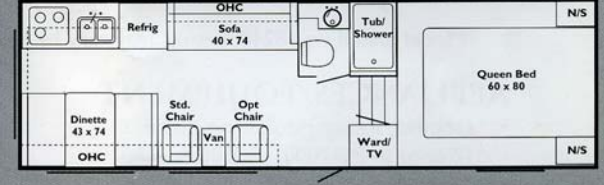


5273-S

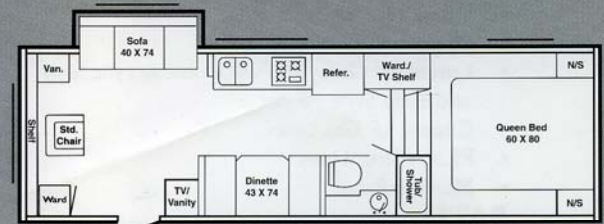

8263-S	8280	8300	8301	8302	8303-S
3815*	3830*	4135*	4010*	4040*	4190*
1500*	1500*	1500*	1500*	1500*	1500*
420*	420*	380*	520*	440*	470*
26'6"	28'8"	30'6"	30'6"	30'6"	30'6"
8'	8'	8'	8'	8'	8'
8'3"	8'3"	8'3"	8'3"	8'3"	8'3"
30	30	30	30	30	30
30	30	30	30	30	30
30	30	30	30	30	30
205/75	205/75	205/75	205/75	205/75	205/75
R14	R14	R14	R14	R14	R14

5240	5241-S	5270	5273-S
4395*	4545*	4760*	4845*
1600*	1600*	1535*	1600*
820*	690*	880*	940*
24'6"	24'6"	27'6"	27'6"
8'	8'	8'	8'
9'5"	8'3"	9'5"	8'3"
30	30	30	30
30	30	30	30
30	30	30	30
205/75	205/75	205/75	205/75
R14	R14	R14	R14

ENCLOSED HEATED UNDERCARRIAGE

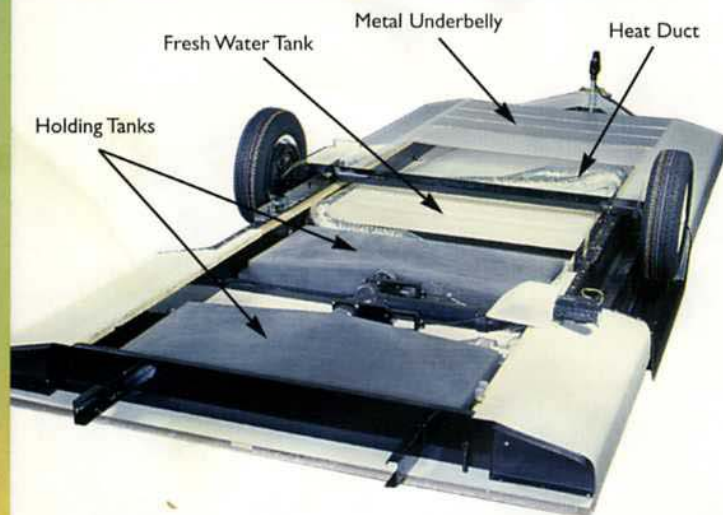

NOTE: Independent testing of our enclosed heated underbelly has produced the following results*

<u>Outside Temperature</u>	<u>Avg. Temperature Inside Underbelly</u>
15° F	37° F
0°	32.1° F

*Model tested was 8240. Results may vary by model.

APPLIANCES/EQUIPMENT

- Dometic Refrigerator, Flush Mount (2 door in 25' 7000, all 8000 & 5000)
- 3 burner Range Top
- Microwave Ready
- Power Range Hood w/Light
- Six Gallon Water Heater (DSI in 8000 & 5000)
- Furnace, 20,000 BTU (30,000 BTU in 8000 & 5000)
- Air Conditioner Ready
- Water Heater By-Pass Kit
- Demand Water Pump
- Laminated Galley Top w/Double Acrylic Sink and Euro Style Faucet
- Copper LP Gas Lines
- P.E.X. Water Lines
- Monitor Panel

BATH

- ABS Tub
- Shower Curtain w/Valance
- Thetford Toilet
- Medicine Cabinet w/Mirror
- Towel Bar, Toothbrush Holder and Tissue Holder
- Power Roof Vent

ELECTRICAL

- Patio Light w/Amber Lens
- Ceiling Lights w/Wall Switches
- 120 Volt GFI Protected Circuits
- 120 Volt Fuse Panel
- Outside 120 Volt Recept
- 30 AMP, 28' Power Cord
- 45 AMP, Whisper Quiet Converter w/Charger
- Battery Box w/Positive Ventilation
- Pre-wired for Air Conditioner
- Pre-wired for Microwave Oven

EXTERIOR

- Five Year Structural Warranty*
- RV 2000 Roof w/12 Year Warranty*
- Fiberglass Skin w/2 Year Warranty*
- Powder Coated Steel Chassis Parts (Where Exposed to Elements)

* Refer to specific written warranty statement.

- Jalousie Windows (Most Windows)
- Aerodynamic Front Profile with High Impact ABS Cap
- Flush Mount Front Window/Awning
- 26" Entry Door(s) w/Radius Corners, Window, Screen Door, and Flush Mount Latch
- Locking Baggage Doors
- Self-Storing Step(s) (Powder Coated)
- Large Front Storage Compartment
- Enclosed 20# LP Tanks 7000 Series, 30# 8000 & 5000 Series
- 2⁵/₁₆" Coupler on Travel Trailers, 2" King Pin on Fifth Wheels
- Safety Chains (N/A on Fifth Wheels)
- Break-away Switch
- Enclosed, Heated Undercarriage
- Sewer Hose Compartment

INTERIOR

- Panoramic Galley Window
- Reversible Dinette Cushions
- Cabinet Bunk(s) Most "Seven" Models
- Valances, Tiebacks, Sheers, Designer Drapes
- Mini Blind at Galley
- Armstrong No-wax Vinyl Flooring
- Partial Carpet (8000 & 5000)
- "Euro Look" Overhead Cabinets w/Under Cabinet Shelves
- Oak Mortise and Tenon Cabinet Doors w/Struts
- Hidden Plumbing and Wiring
- High Pressure, Laminated Countertops w/Brass Trim
- Bedspread (with Double, Twin or Queen Bed)
- Headboard (with Double, Twin or Queen Bed)
- Light/Air Roof Vent(s)
- Fire Extinguisher
- Smoke Detector
- LP Detector

RUNNING GEAR

- Radial Trailer Tires
- White Spoke Wheels
- 10" Electric Brakes-All Wheels
- Independent Torsion Suspension System, Rubber Ride
- Seamless "Roto-Cast" Wheel Wells
- Welded, Box Channel, Tubular Steel Frame

OPTIONS

Approx. Wt.

- Air Conditioning, 13,500 BTU..... 104#
- AM/FM CD Player 4#
- Awning, A & E 8300 40-60#
- Chair 35#
- Microwave Oven 30#
- Convection Microwave Oven..... 38#
- Spare Tire & Wheel 30# or 35#
- Stabilizer Jacks (four)..... 24#
- TV Antenna 6#
- Roof Rack & Ladder 15#

High Impact ABS Front Cap Creates Front Storage Compartment



SPECIFICATIONS

1999 TOWING SPECIFICATIONS

Listed below are tow ratings that are the highest available for the respective models. Certain optional equipment may be required and other restrictions may apply. Check with your automotive dealer for exact specifications.

VEHICLE	ENGINE	TOW LIMIT (lbs.)	VEHICLE	ENGINE	TOW LIMIT (lbs.)
ACURA			JAGUAR		
SLX	3.2 V-6	5000	All models	All	3307
RL	3.5 V-6	2000	JEEP		
AM GENERAL			Cherokee w/manual trans.	2.5 I-4	2000
Hummer (2-passenger)	Diesel	8510	Cherokee/Grand Cherokee	4.0 I-6	5000
Hummer (2-passenger)	Turbodiesel	8440	Grand Cherokee Laredo/TSI/Ltd	5.2 V-8	6700
BUICK			Grand Cherokee Limited	5.9 V-8	5000
Regal	3.8 V-6	2000	Wrangler	4.0 I-6	2000
CADILLAC			KIA		
All	4.6 V-8	3000	Sportage	2.0 I-4	2000
CHEVROLET/GMC			LAND ROVER		
Astro/Safari (AWD)	4.3 V-6	5000	Discovery	All	5500
Astro/Safari (RWD)	4.3 V-6	5500	Range Rover	All	6500
Blazer/Jimmy (2WD)	4.3 V-6	5500	LEXUS		
Express/Savana/G1500	4.3 V-6	4500	LS/ES models	All	2000
Express/Savana/G1500	5.0 V-8	5000	LX450	4.5 I-6	5000
Express/Savana/G1500	5.7 V-8	6500	LINCOLN		
Express/Savana/G2500	5.0 V-8	5000	Continental/Mark III	4.6 V-8	2000
Express/Savana/G2500/3500	5.7 V-8	7000	Navigator	5.4 V-8	8000
K1500 Reg/Ext Cab. (4WD)	4.8 V-8	7500	MAZDA		
S-Series/Sonoma	4.3 V-6	5500	B3000	3.0 V-6	4000
Silverado/Sierra/C/K 1500	4.3 V-6	3500	B3000 (4WD)	3.0 V-6	3700
CHRYSLER			B4000	4.0 V-6	6000
Concord, LHS	All	2000	B4000 (4WD)	4.0 V-6	5700
Cirrus, Sebring Convertible	2.5 V-6	2000	MPV	3.0 V-6	4300
Town & Country	3.3, 3.8 V-6	3500	MPV (AWD)	3.0 V-6	4000
DODGE			MERCURY		
Caravan	2.4 I-4	2000	Cougar XR7	All	2000
Caravan	3.3, 3.8 V-6	3500	Grand Marquis	4.6 V-8	2000
Dakota (2WD) Reg. Cab.	2.5 I-4	2500	Mountaineer	5.0 V-8	6700
Dakota (2WD) Reg. Cab.	3.9 V-6	5500	Villager	3.0 V-6	3500
Dakota (2WD) Reg. Cab.	5.2 V-8	6900	Mountaineer	4.0 V-6	5860
Dakota (2WD) Club Cab.	3.9 V-6	4800	MITSUBISHI		
Dakota (2WD) Club Cab.	5.2 V-8	6900	Montero	3.5 V6	5000
Dakota (4WD) Reg. Cab.	3.9 V-6	5200	Montero Sport ES	2.4 I-4	2300
Dakota (4WD) Reg. Cab.	5.2 V-8	6500	Montero Sport LS, XLS	3.0 V-6	5000
Dakota (4WD) Club Cab.	3.9 V-6	5000	NISSAN		
Dakota (4WD) Club Cab.	5.2 V-8	6400	Pathfinder	3.3 V-6	5000
Durango (4WD)	3.9 V-6	4700	Frontier	2.4 I-4	3500
Durango (4WD)	5.2 V-8	5900	Quest	3.0 V-6	3500
Durango (4WD)	5.9 V-8	7400	OLDSMOBILE		
Intrepid	All	2000	Bravada	4.3 V-6	5000
Ram (2WD) 1500 All Cab.	3.9 V-6	4000	Silhouette	3.4 V-6	2000
Ram (2WD) 1500 All Cab.	5.2 V-8	5500	PLYMOUTH		
Ram Wagon B1500	3.9 V-6	4000	Voyager (FWD)	3.0 V-6	2000
Ram Wagon B2500	5.2 V-8	7600	Voyager (FWD)	3.3 V-6	3500
FORD			PONTIAC		
Econoline Van	4.2 V-6	5700	Montana	3.4 V-6	3500
Econoline Van	4.6 V-8	6100	SAAB		
Econoline Van	5.4 V-8	7500	All	All	2000
Crown Victoria	4.6 V-8	2000	SUBARU		
Expedition (4WD)	4.6 V-8	6000	Legacy Outback/Forester	2.5 I-4	2000
Expedition (2WD)	5.4 V-8	8300	TOYOTA		
Expedition (4WD)	5.4 V-8	7900	4 Runner	2.7 I-4	3500
Explorer 2Dr (2WD)	4.0 V-6	5100	4 Runner	3.4 V-6	5000
Explorer 2Dr (4WD)	SOHC 4.0 V-6	4880	Camry/Avalon	All	2000
Explorer 4Dr (2WD)	SOHC 4.0 V-6	5900	Land Cruiser	4.7 V-8	5500
Explorer 4Dr (4WD)	SOHC 4.0 V-6	5680	Sienna	3.0 V-6	3500
Explorer 4Dr (2WD)	5.0 V-8	6700	Tacoma	All I-4	3500
F-150 Reg. Cab. (2WD)	4.2 V-6	5800	Tacoma	3.4 V-6	5000
F-150 Reg. Cab. (2WD)	4.6 V-8	7300	Tundra	4.7 V-8	7200
Ranger Reg. Cab. (2WD)	2.5 I-4	2240	VOLKSWAGON		
Ranger Reg. Cab. (4WD)	3.0 V-6	4360	Eurovan	All	4400
Ranger Reg. Cab. (2WD)	4.0 V-6	6000	VOLVO		
Windstar	3.0 V-6	2000	All	All	3300
Windstar	3.8 V-6	3500			
HONDA					
Passport	3.2 V-6	4500			
Odyssey	24 Valve V-6	3500			
INFINITI					
QX4	3.3 V-6	5000			
ISUZU					
Hombre/Rodeo/Amigo	2.2, 2.6 I-4	2000			
Rodeo	3.2 V-6	4500			
Trooper	3.2 V-6	5000			
Amigo	3.2 V-6	4500			

Trail-Lite constantly strives to improve its product, all specifications are subject to change without notice.



DIV. OF R-VISION, INC.

2666 S. COUNTRY CLUB • WARSAW, IN 46580

<http://www.trail-lite.com>